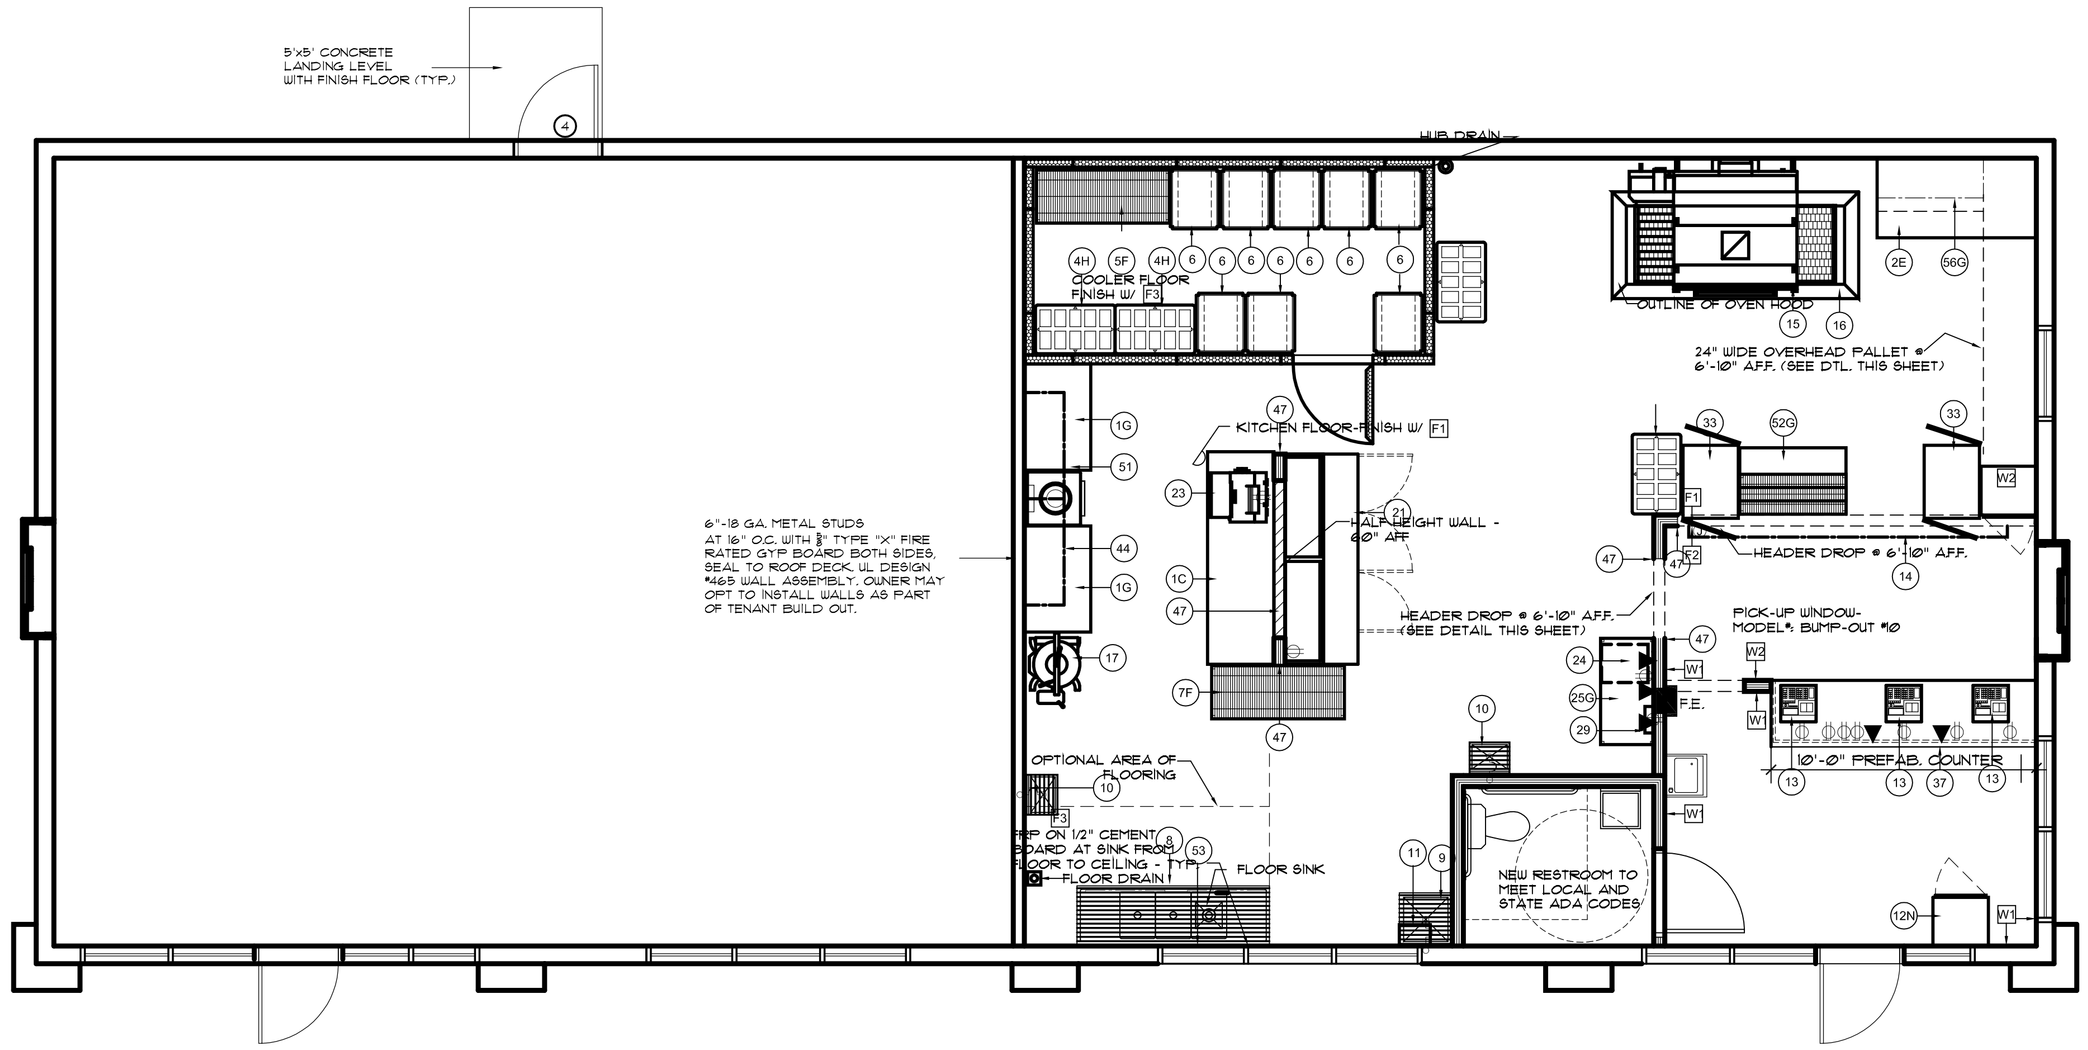

1 EQUIPMENT PLAN

SCALE: 1/4" = 1'-0"

EQUIPMENT SCHEDULE ◯ INDICATES EQUIPMENT CALLOUT					ELECTRICAL REQUIREMENTS							PLUMBING REQUIREMENTS					BLUELINE EQUIPMENT (800) 447-1933 (248) 448-6200 FAX: (248) 442-4657
A. 120" B. 108" C. 96" D. 84" E. 72" F. 60" G. 48" H. 36" J. 42" K. 30" L. 24"			NOTE: AMPS SHOWN ARE ACTUAL POWER USEAGE.		AMPS (AMPS SHOWN)	WATTS	H P	VOLTS	POLE	DIRECT	PLUG	WATER		DRAIN		GAS	
#	DESCRIPTION	MANUFACTURER	MODEL NO.	BLUELINE NO.								HOT	COLD	DIRECT	IND.	BTU'S	COMMENTS
1C	S.S. WORK TABLE [30" x 96"]	DUKE MANUFACTURING CO.	314-3096-5LRC-H	008713													WITH CASTERS
1G	S.S. WORK TABLE [30" x 48"]	DUKE MANUFACTURING CO.	316-3048-5RLC	008154													WITH CASTERS
2E	S.S. LANDING TABLE [36" x 72"]	DUKE MANUFACTURING CO.	316-3672-5RLC	008160													WITH CASTERS
2G	S.S. LANDING TABLE [36" x 48"]	DUKE MANUFACTURING CO.	316–3648-5RLC	008165													WITH CASTERS
4H	POLYMER DUNNAGE RACK [22" x 36"]	METRO	HP2236PD	067407													
5F	POLYPROPYLENE RACK [24" x 60"]	METRO	Q2460G2	067418													
6	DOUGH RACKS [22" x 27"]	LOCKWOOD	RA70 ER 24 E	007490													
7F	SUPER ERECTA WIRE RACK [24" x 60"]	METRO	A2460NK3	067422													METROSEAL 3 FINISH
8	3 COMP. POT SINK W/2 DRAINBOARDS	AERO MANUFACTURING CO.	MF3-2116-18LR	497809								3/4"	3/4"		2"		COMPARTMENTS 16"W X 21" L X 14"D
9	MOP SERVICE BASIN [BY CONTRACTOR]	FIAT [FLOOR MOUNT]	MSB2424	BY CONTRACTOR								3/4"	3/4"	3"			
10	HAND SINK	AERO MANUFACTURING CO.	HSF	498002								1/2"	1/2"	1 1/2"			
11	TANKLESS GAS WATER HEATER	RINNAI	R94LSI	BY CONTRACTOR		79		120	1				3/4"				NATIONAL PRICING (866-383-0707)
12N	REACH-IN SODA COOLER	TRUE MANUFACTURING	GDM-12	BY LOCAL BOTTLER	5.0	600	1/5	120	1		X						NEMA 5-15P
13	CASH REGISTER	SHARP	ER330	272397	0.32	38		120	1		X						ISOLATED GROUND
14	ILLUM. MENU PANEL [2'-2" x 12'-0"]	NATIONAL SIGN	HOT-N-READY	045796	2.55	306		120	1		X						
15	GAS CONVEYOR OVEN [3 DECK]	BOFI	XLT-3255-TS3	738855 SPLIT BELT	6	720		120	1		X					450,000	6 AMPS & 150,000 BTUH PER DECK
16	HOOD SYSTEM [XLT-3270-TS3]	XLT	AVI 3270	697002													INCLUDES CONTROL PANEL
	EXHAUST FAN [XLT-3270-TS3]	ACCUREX	XRUD-141-VG	697000	4.7	560	0.75	120	1	X							INTERLOCK WITH MAKE-UP AIR
17	MIXER	HOBART	HCM450	333025	30	7197	5	208/240	3	X							PROVIDE NON FUSED DISCONNECT
21	PIZZA RETARDER [95"] W/OVERSHELF	RANDELL	8395N	007190 & 007191	12	1440	1/2	120	1		X						NEMA 5-15P
23	SHEETER	SOMERSET	CDR-2000	008542	14	1680	3/4	120	1		X						
24	UNDER COUNTER SAFE	BLUEDOT SAFES		009321													NEED 9V BATTERY
25G	PHONE STATION [24" x 48"]/SOLID SHELF	METRO	2448FS/A2448BR-33P	067417		700		120	1		X						SUPER ERECTA CHROME
26	HOT & READY DOUBLE RACK	LOCKWOOD	RA65-RR42-LC	007495													
28R	73" X 56" FOOD PHOTOGRAPHY MURAL	ADCOLOR	CAESAR'S FAVORITES	009260													
29	TIME CLOCK [AUTOMATIC]	BLUELINE		007009		20		120	1		X						
33	HEATED HOLDING CABINET	CRES COR	H138NPS30CLCM	094002 (RIGHT HINGE)	16	1920		120	1		X						NEMA L5-20P
37	12'-0" PRE-FAB FRONT COUNTER	DUKE MANUFACTURING CO.	LCE	008716													
42	CUSTOMER WAITING CHAIR	SMI	SM-162-G-BK-CH	952100													MOLDED SLED BASE STACK CHAIR
44	DOUBLE WALL SHELVING UNIT [18" x 48"]	METRO	DOUB 1848	067410													
45	7'-9" x 15'-5" x 8'-3" WALK-IN COOLER	BLUELINE	LCE	348602	15	5398	1.5	208/230	3	X							EVAPORATOR & COMPRESSOR
	(2) WALK-IN COOLER LIGHT					100		120	1	X							WITH TWO GLASS DOORS
47	5.25" x 9'-0" STAINLESS STEEL END CAP	UNIFIED	LCE	430222													
51	DOUGH ROUNDER	AM MANUFACTURING	ROUND O MATIC R900RT	008690	15	1800	1	120	1		X						AVAILABLE IN 3 PHASE
52G	48" BREAD STATION	METRO	SUPER ERECTA CHROME	067405													
	WITH HEAT LAMPS & 30" SOLID SHELF	APW WYOTT	FD-48	699312	6.6	800		120	1		X						ONE CIRCUIT @ 800W EA. REQ'D
53	DISHWASHING STATION STORAGE GRID	METRO		067400													30" x 36" W/ACCESSORIES
56G	48" LANDING STATION SHELF & GRID	METRO		067402													30" x 48" W/ACCESSORIES

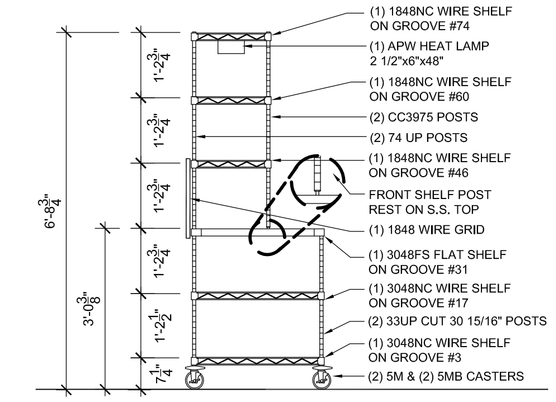

3 BREAD STATION RACK

SCALE: 1/2" = 1'-0"

✳ THREE STANDARD WINDOW HEIGHTS

43-1/2" H WITH 19"W x 36"H SERVICE OPENING

35-3/4" H WITH 19"W x 28"H SERVICE OPENING

30" H WITH 19"W x 22"H SERVICE OPENING (PASSES CALIFORNIA RESTRICTED OPENING REQUIREMENTS)

CUSTOM SIZES ALSO AVAILABLE. PLEASE CONTACT READY ACCESS FOR MORE INFORMATION.

ELECTRICAL REQUIREMENTS

115 vac - 60 Hz WITH A 15 amp BRANCH CIRCUIT

READY ACCESS 275
www.ready-access.com
(800) 621-5045

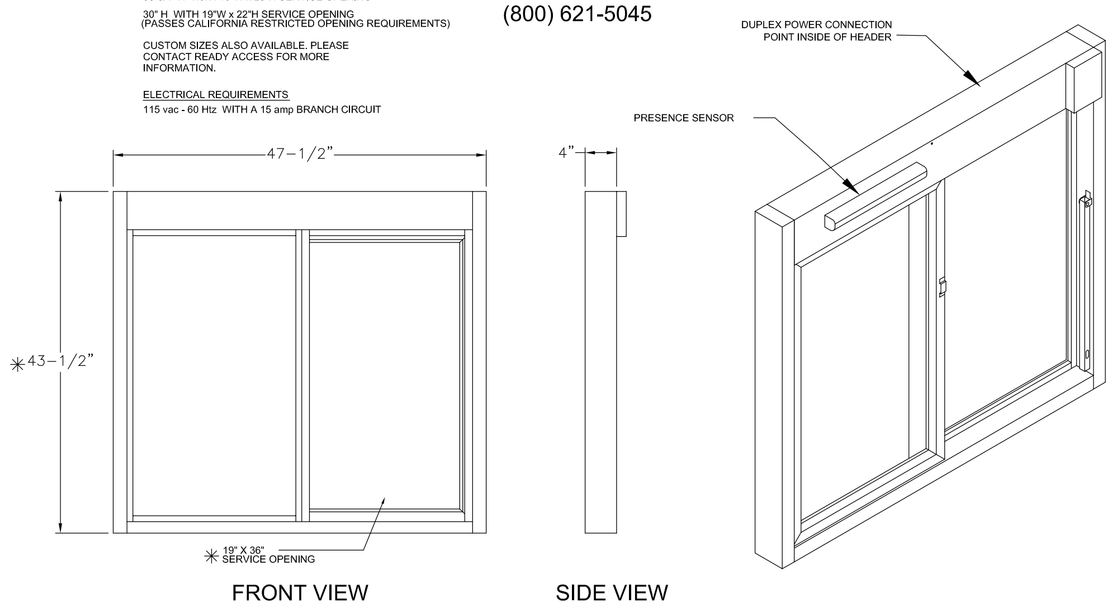

3 PICK UP WINDOW

NOT TO SCALE

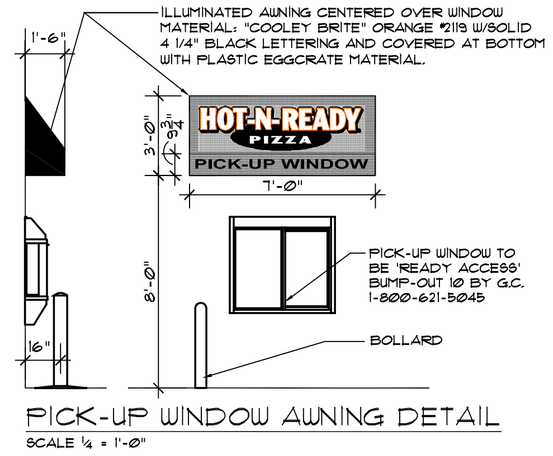

PICK-UP WINDOW AWNING DETAIL

SCALE 1/4 = 1'-0"

4 PICK UP WINDOW AWNING

SCALE: 1/4" = 1'-0"

Revisions
--

Little Caesar ENTERPRISES, INC.
12993 JOOR RD.
CENTRAL, LOUISIANA 70818

MARK P. MATTHEWS REG. No. 6114 STATE OF LOUISIANA REGISTERED ARCHITECT

MARK MATTHEWS AIA • ARCHITECT
11502 Cloverland Ct. • Baton Rouge, LA • 70809 • (225) 756-5011

Date 11-01-2013
Drawn JPD
Checked MPM
Job Number --
Sheet A1.2